




CS-0.75-2

*installation
speaker
100V Line
LSZH*

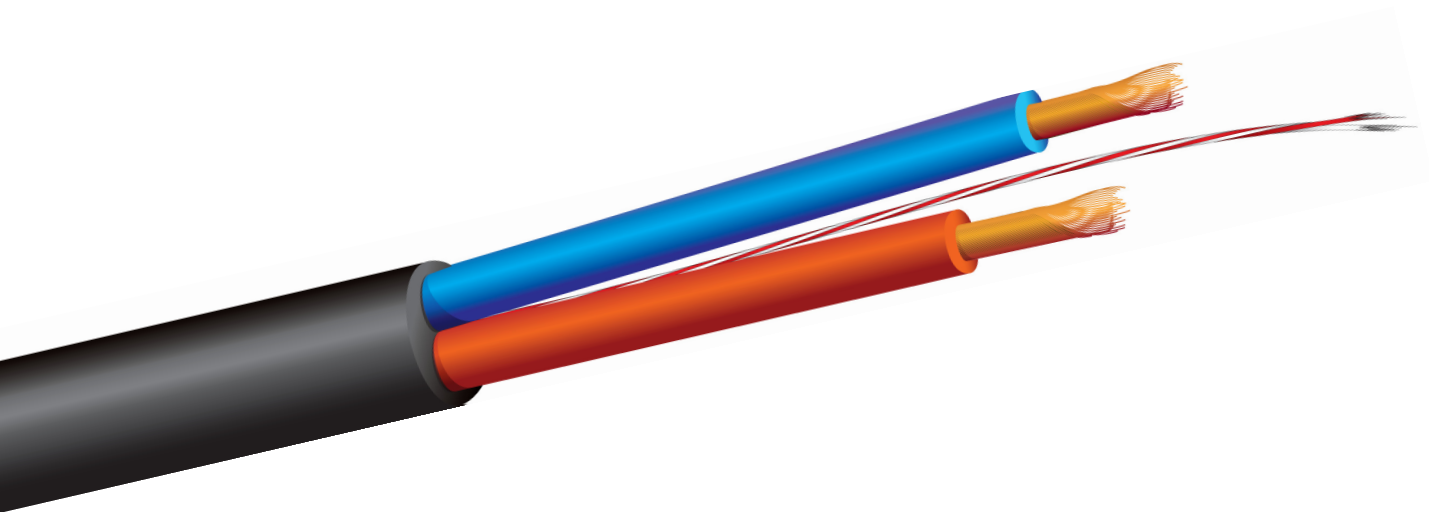

Kelsey CS Contractor Series speaker cables adopt the excellent characteristics of the SPL range with an abrasion resistant Low Smoke Zero Halogen jacket to meet health & safety requirements for public areas.

An easy-glide finish ensures it can be dragged smoothly through conduit, across surfaces and across other cables. Its high voltage rating makes it suitable for 100V line installations.

Unlike many other LSZH products the CS range remains durable and flexible for easy installation.




DISTRIBUTED BY FUZION PLC

9 LYON ROAD, WALTON ON THAMES, SURREY KT12 3PU

T: +44 1932 88 22 22

WWW.FUZION.CO.UK

CS-0.75-2

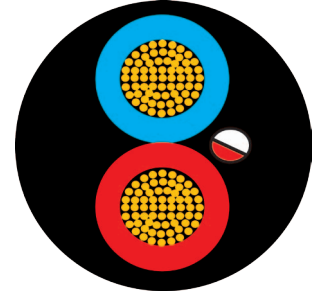

SPECIFICATIONS

Conductors	<i>Material</i>	Stranded oxygen-free copper	
	<i>Size</i>	24 * 0.20mm (0.75mm ²) AWG 19	
Insulation	<i>Material</i>	PE (2Y)	
	<i>Diameter</i>	1.96mm +/-0.05mm	
	<i>Shorehardness (A)</i>	90 +/-3	
	<i>Colour</i>	Blue, Red	
Outer Jacket	<i>Material</i>	EPDM (3G)	
	<i>Colour</i>	Black, matt finish, RAL 9005	
	<i>Overall Diameter</i>	5.2mm +/-0.20mm	
	<i>Shorehardness (A)</i>	80 +/-3	
	<i>Bend Radius</i>	41.6mm	
	<i>Weight kg/metre</i>	0.04	
	<i>Laying</i>	2 cores with red/white marker thread	
	<i>Drum Sizes</i>	500m, 100m, cut lengths	
	<i>Order Code</i>	KC.CS-0.75-2	
Technical Data	<i>Test Voltage</i>	1kV at 50Hz, effective for 1 minute	
	<i>Insulation Resistance Min:</i>	100M Ohm/Km at 20°C	
	<i>Conductor Resistance Max:</i>	85 Ohm/Km at 20°C	
	<i>Temperature Rating</i>	Static:	-30°C to +70°C
		Operating:	-10°C to +70°C
	<i>Operating Voltage</i>	Max: 300/500V AC/DC (Not suitable as a mains cable) RoHS Compliant	
Printing Detail	CS OFC 2X 0.75 SPEAKER/POWER CABLE LSZH		

E & OE, specifications and design subject to change without notice