




## Wiring Diagrams - CO Series Microphones

### AKG TA3F Connector

The CO microphone cable has two conductors:


- Connect first to pin-1 Shield
- Connect second to pin-2 Audio

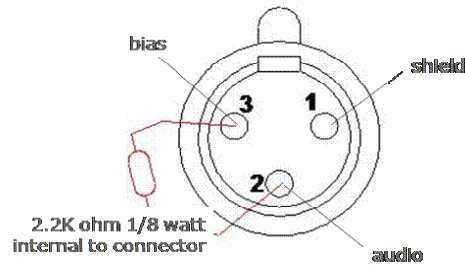

### Audio-Technica TA5F Connector (for T101 Transmitter)

The CO microphone cable has two conductors:


- Connect first to pin-1 Shield
- Connect second to pin-3 Audio

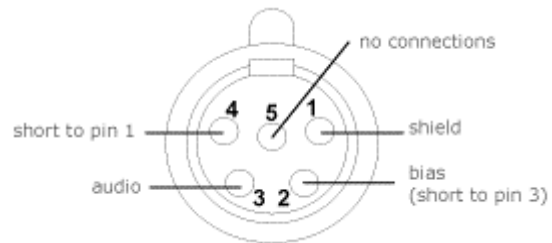

### Audio-Technica Hirose Connector (for T1801 Transmitter)

The CO microphone cable has two conductors:


- Connect first to pin-1 Shield
- Connect second to pin-3 Audio

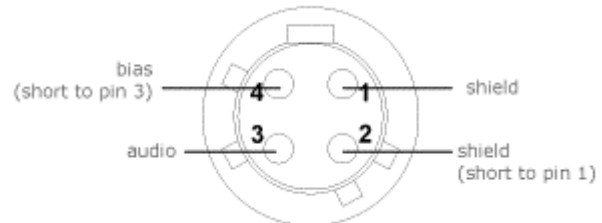

### Audio-Technica Hirose Connector (for T601/T701 Transmitter)

The CO microphone cable has two conductors:


- Connect first to pin-1 Shield
- Connect second to pin-3 Audio

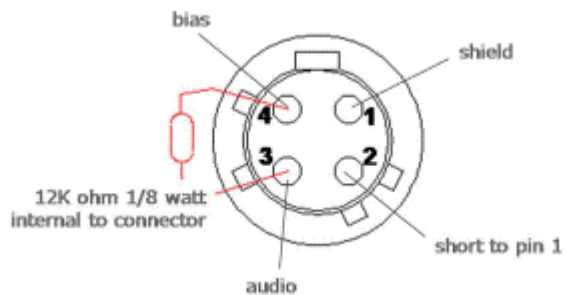

### Audix RAD 360-BP TA3F Connector

The CO microphone cable has two conductors:


- Connect first to pin-1 Shield
- Connect second to pin-2 Audio

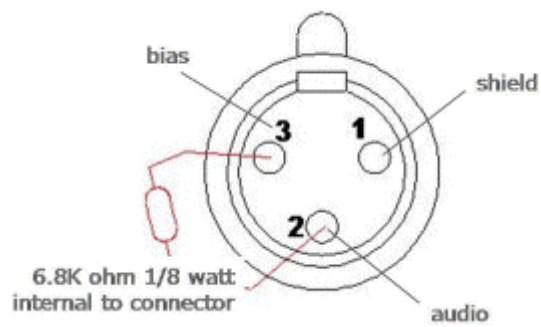

### Electrovoice TA4F Connector

The CO microphone cable has two conductors:


- Connect first to pin-1 Shield
- Connect second to pin-2 Audio

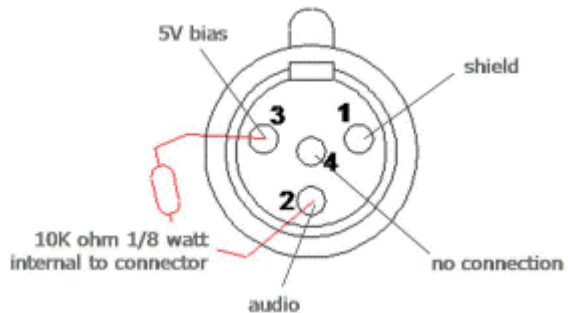

### MIPRO TA4F Connector

The CO microphone cable has two conductors:


- Connect first to pin-1 Shield
- Connect second to pin-2 Audio

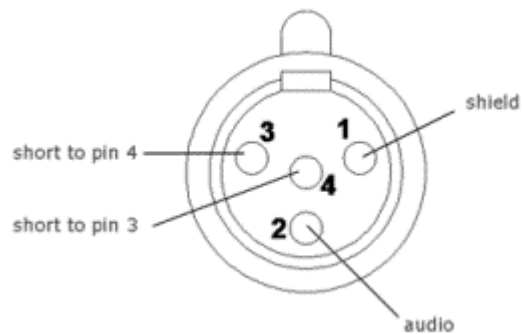

### Peavey PCX Series TA4F Connector

The CO microphone cable has two conductors:


- Connect first to pin-1 Shield
- Connect second to pin-3 Audio

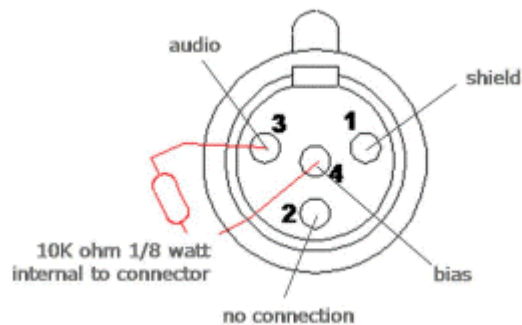

### Samson Hirose Connector UT6

The CO microphone cable has two conductors:


- Connect first to pin-6 Shield
- Connect second to pin-2 Audio

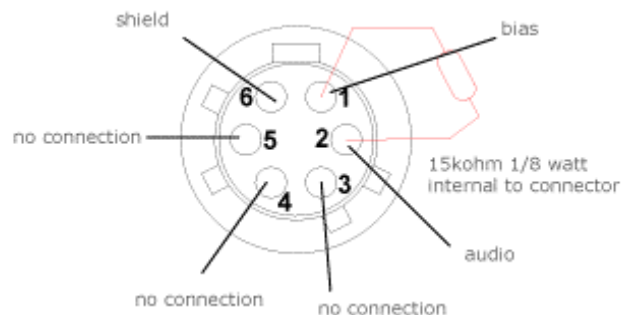

## Sennheiser Transmitter

**3.5 mm TRS Locking Connector**  
The CO microphone cable has two conductors:


- Connect first to Sleeve
- Connect second to Tip

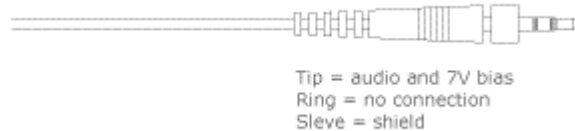

## Shure TA4F Connector

The CO microphone cable has two conductors:


- Connect first to pin-1 Shield
- Connect second to pin-3 Audio

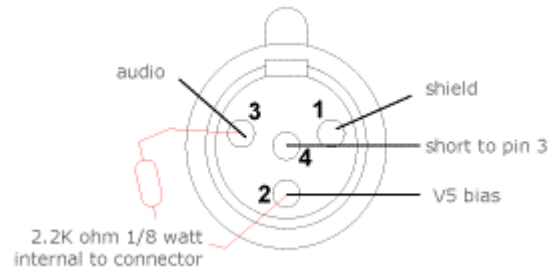

## Sony 3.5mm TRS Locking Connector (For WRT 805 Transmitter)

The CO microphone cable has two conductors:

- Connect first to Sleeve
- Connect second to Tip

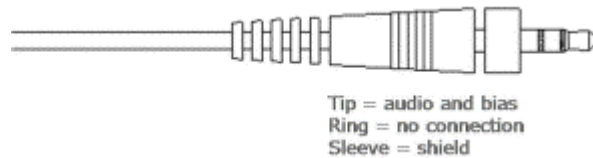

## TOA WM5320 Transmitter 3.5 mm TRS Connector (w/proprietary locking housing)

The CO microphone cable has two conductors:

- Connect first to Sleeve
- Connect second to Tip

