

HOT SPOT[®]

CONTROLLED
BANDWIDTH

COMPACT
VOCAL
MONITOR

GALAXY AUDIO

Developed specifically for nearfield vocal monitoring, the Hot Spot and Hot Spot VC weigh only 8 pounds and have power handling capacities of 200 watts and frequency responses of 150 Hz to 15 kHz. Hot Spots provide incredible intelligibility and superior gain before feedback. Each 16 ohm Hot Spot features two ferro fluid cooled five-inch drivers with 40-ounce magnet structures. 96 dB (1 watt/1 meter) sensitivity and a maximum SPL of 123 dB (200 watts/.5 meter) ensure that the Hot Spot delivers the power and clarity necessary to cut through

the most extreme ambient noise levels. The cabinet is constructed of black high impact ABS and has a charcoal foam grille. One ¼-inch jack serves as the speaker's input; another makes it possible to link multiple Hot Spots. The Hot Spot VC's front-mounted seven step volume control offers 18 dB of adjustability (in 3 dB increments). An integral adaptor allows the Hot Spot to be mounted on a microphone stand. When positioned in close proximity to the performer, the Hot Spot is louder, more direct and less likely to cause feedback than a conventional floor monitor. A black vinyl strap handle is available.

MADE IN USA



Hot Spot VC (with optional volume control)

HOT SPOT[®]


GALAXY AUDIO

**CONTROLLED
BANDWIDTH**

**COMPACT
VOCAL
MONITOR**

SPECIFICATIONS

Frequency response 150 Hz - 15 kHz
Power handling capacity 200 Watts
Sensitivity (1 watt @ 1 Meter) 96 dB (1 kHz octave band)
Maximum SPL (200 watts @ .5 meter): 123 dB
Splowt 15.37
Speaker complement Two ferro fluid cooled 5 -inch drivers with 40 oz. (1.1 kg) (each) magnet structures
Nominal impedance 16 ohms
Input connection ¼ -inch jack
Enclosure Materials High impact ABS plastic
Color Black case with charcoal foam grille
Volume control (model VC only) 18 dB range; 7 positions at 3 dB each
Optional accessories
Black vinyl strap handle
SA-1 spun aluminum stand adaptor allows HOT SPOTS to be used on KM style mic stands.
Dimensions 6.75-inches x 10.94-inches x 6-inches (171 mm x 278 mm x 152 mm)
Net weight 8 lbs. (3.6 kg)
Shipping weight (pair) 17 lbs. (7.7 kg)

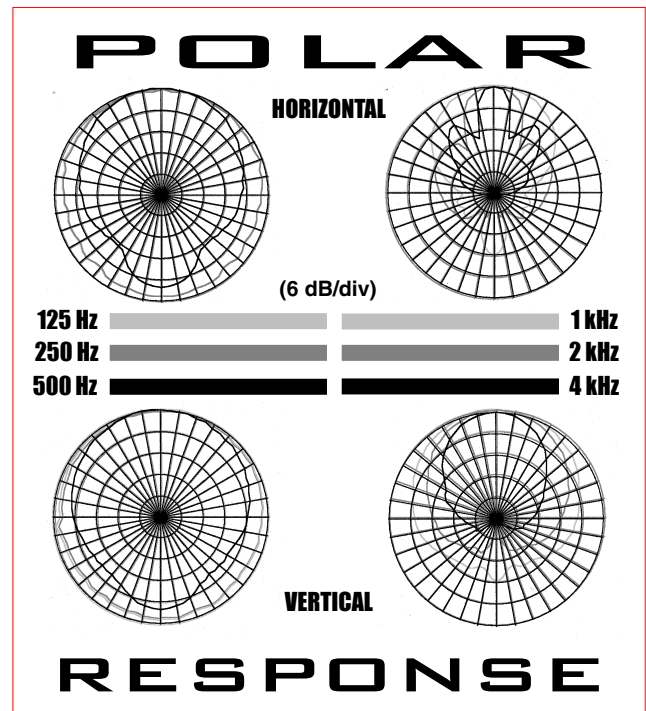

FerroSound
The Solution Is Loud And Clear.™

ARCHITECT AND ENGINEER SPECIFICATIONS

The loudspeaker shall be a full range system offering two ferro fluid cooled 5-inch drivers with 40-ounce magnet structures. The loudspeaker shall be capable of handling 200 watts of continuous program. Nominal impedance shall be 16 ohms. Input connection shall be a ¼-inch phone jack. The enclosure shall be constructed of rugged ABS plastic and feature a foam grille cover. The cabinet shall be available in black with a black bezel. An integrated flange shall be provided to accommodate microphone stand mounting. An optional handle shall be offered. Dimensions shall be 10.94 inches wide (278 mm), 6.75 inches high (171 mm), and 6 inches deep (152 mm). The system's weight shall be 8.25 lbs (3.37 kg). The loudspeaker system shall be the **GALAXY AUDIO HOT SPOT**.

GALAXY AUDIO

601 E. Pawnee Wichita, KS 67211 316.263.2852 FAX 316.263.0642 www.galaxyaudio.com

Distributed outside the United States and Canada by **E and E Exports, Inc.** 17922 Sky Park Circle, Suite P, Irvine, CA 92714
949.440.0760 FAX 949.440.0766

Distributed in Canada by **A.C. Simmonds & Sons Limited** 580 Granite Court, Pickering, Ontario, Canada L1W 3Z4
905.839.8041 FAX 905.839.2667